



STROMBERG



STROMBERG e-FIRE OWNER'S MANUAL

MODELS 11A/21A

THANK YOU

for choosing a Genuine Stromberg e-FIRE Electronic Distributor for your Flathead Ford. This Owner's Manual will make installation and adjustment as safe and trouble-free as possible. It contains several warnings, cautions and notes. Please read them all. It also includes important information about the Stromberg warranty and what to do if you need help.

Please remember, if you have any questions about distributor installation and timing, there is more help online at the Stromberg Tech Center: **www.stromberg-97.com**. You can also contact us direct: **tech@stromberg-97.com**

READ THIS FIRST

WARNINGS! AND NOTES

These instructions must be read and fully understood before beginning installation. If these instructions are not fully understood, installation should not be attempted. Failure to follow these instructions, including illustrations, may void your warranty and may result in poor performance, vehicle damage, property damage, severe personal injury or death. If you need information or assistance, please contact your Stromberg dealer or email us direct: tech@stromberg-97.com

WARNING!

The e-FIRE ignition module must be used with a points style coil only, with a resistance in the primary circuit of at least 3.0 Ohms (Ω) or 1.5 Ohms with a ballast resistor. DO NOT use a low-resistance or HEI-style coil. Coils of less than 1.5 Ohms resistance are not suitable and will invalidate the warranty.

WARNING!

Correct distributor installation and set up is critical to engine performance, so a thorough knowledge of vehicle mechanical and electrical systems is required. Stromberg recommends installation by a professional mechanic only. An improperly installed or adjusted distributor may void your warranty and may cause poor engine performance or damage, property damage, personal injury, or death.

WARNING!

This distributor is not designed for use with engines or transmissions requiring computer-control. Use with these applications may cause damage. This distributor is not designed for MARINE or AIRCRAFT applications.

NOTE: This product is legal only for off-road use or for use on pre-emission controlled motor vehicles/engines. In the USA, this means pre-1966 domestic vehicles certified to California standards, pre-1968 domestic vehicles certified to federal standards and all pre-1968 foreign vehicles.

WARNING!

Before installation, verify that all mechanical and electrical systems are in good working order. These include engine components like intake manifold and gaskets, electrical components including, but not limited to, spark plug wires, battery, battery cables, starter and starter solenoid, and fuel system including fuel tank and fuel lines. Any damaged or improperly operating components must be replaced prior to installing the distributor. Failure to do so may result in poor performance, property damage, serious personal injury or death.

1. PRE-INSTALLATION CHECKLIST

- A)** Inspect your new Stromberg e-FIRE Electronic Distributor for possible shipping damage. Check you have the correct model for your application. eg. Do you need the two-bolt 21-A (1941-48) or three-bolt 11A (1932-40) model?
- B)** Is your vehicle wiring 12 volt negative or 6 volt positive? Model details are clearly marked on the distributor nameplate and packaging.

WARNING:

Do not proceed unless your vehicle's electrical system matches that clearly marked on your new e-FIRE distributor. The wrong polarity will cause the e-FIRE ignition module to fail and void your warranty.

- C)** The e-FIRE ignition module is compatible with a points style coil ONLY, with a resistance in the primary circuit of at least 3.0 Ohms (Ω) or 1.5 Ohms with a ballast resistor. If your current system has a ballast resistor, do not remove it.

WARNING:

DO NOT use a low-resistance or HEI-style coil. Using a coil of less than 1.5 Ohms resistance can cause the ignition module to overheat, misfire and fail prematurely and will invalidate the warranty. Information on how to test your coil can be found online at the Stromberg Tech Center: www.stromberg-97.com.

- D)** With a 12 volt model, battery voltage measured at the coil's positive terminal with the engine running, must not exceed 14 volts at any RPM level. In a 6 volt charging circuit, aim for no more than 8 volts under no load (ie. no lights, no heater etc).

WARNING:

Excessive charging will cause excess voltage through the ignition module causing overheating and potential failure.

- E)** Do not use solid core (typically copper) spark plug leads, as they lack resistance and do not suppress electro magnetic interference (EMI) which can damage the e-FIRE ignition module. Use suppression style or spiral wound spark plug leads.
- F)** Electronic ignition modules rely on a good quality ground (earth) connection. We recommend checking all ground connections and even running an additional engine ground if required.
- G)** If your engine has a starter bypass wire, you can leave it in place.

2. REMOVE EXISTING DISTRIBUTOR

WARNING:

Always disconnect your vehicle's battery, making sure the ignition is off and the engine is cool before performing any work. Failure to do so may result in sparks or burns, and cause a fire or explosion, resulting in property damage, serious personal injury or death.

- A)** Disconnect the vehicle's battery. Remove the condenser and any radio suppressors. They are not required nor compatible with the Stromberg e-FIRE distributor.
- B)** Disconnect the distributor low tension wire at the coil. Disconnect the high tension spark plug leads and remove the distributor cap. It may be helpful to mark each lead to aid replacement on the new distributor.



- C)** Carefully disconnect the vacuum advance line, if fitted. It is not required for the new e-FIRE distributor. Plug any threaded holes left in the intake manifold. The corresponding hole in the timing cover can be left plugged.
- D)** Unbolt and remove the distributor from the front of the engine. Remove all traces of the old gasket from the mounting flange.

slot **MUST** align to center the distributor on the mount. It is easier to install if you remove the distributor cap and turn the rotor arm to help align and engage the drive key in the slot.


- C)** Install the mounting bolts and washers. Do **NOT** over tighten the fasteners. Check that the distributor sits flat on the mounting surface.

3. INSTALL NEW DISTRIBUTOR



- A)** Verify that the timing cover distributor mounting surface is clean and flat. Make a note of the position of the offset slot on the end of the camshaft or cam drive adapter (see pic A) and turn the offset distributor drive key (see pic B) to approximately match before you offer the distributor onto the engine.

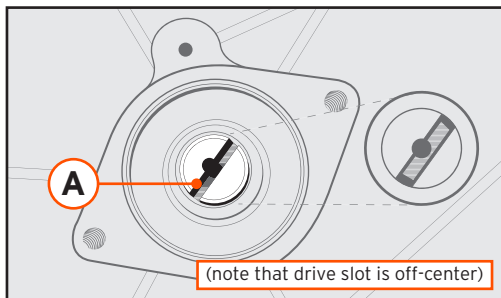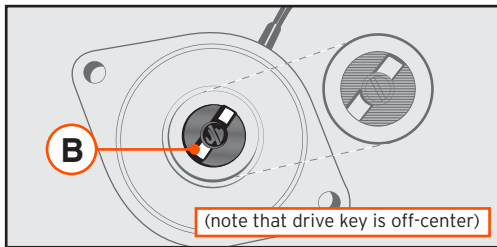

- D)** Connect the spark plug leads, matching the numbers marked on the distributor cap to their correct cylinder locations (see pic C). The firing order (1-5-4-8-6-3-7-2) and cylinder numbers are the same for all Flathead Ford V8s from 1932 through 1951. Remember that the distributor turns counterclockwise.

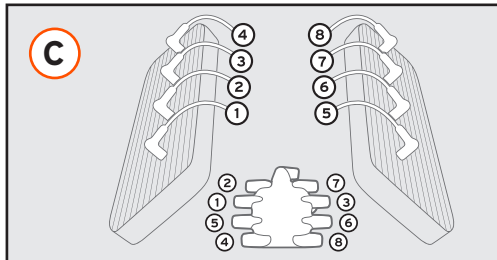


- B)** Install the Stromberg e-FIRE distributor, with its gasket (supplied) onto the front of the engine, engaging the distributor drive key into the offset slot on the end of the camshaft or cam drive adapter. Note that the drive key and camshaft

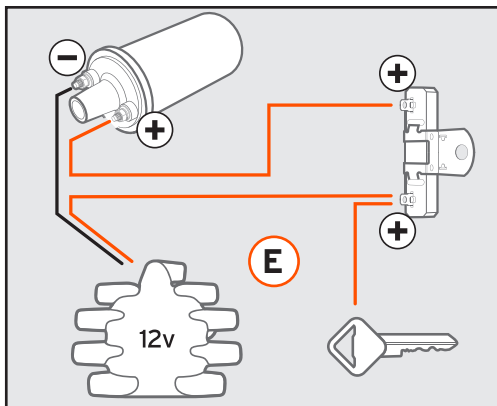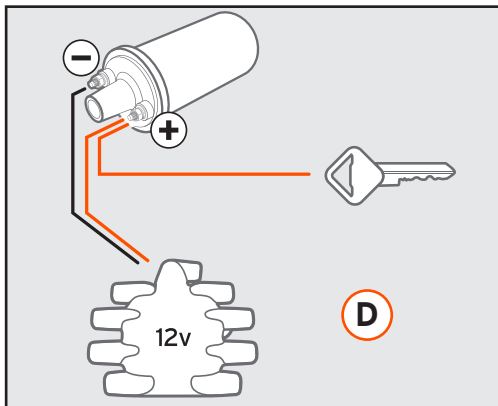


E) The 12 volt negative ground e-FIRE distributor has red and black low tension wires. Connect the black module wire to the negative (-) side of the ignition coil. On engines without a ballast resistor or resistor wire, connect the red wire to the positive (+) side of the ignition coil or other power source controlled by the ignition switch. (see pic D).

F) If your ignition has a primary circuit ballast resistor or wire, connect the red wire to the ignition switch side of the ballast resistor. If the position of the ballast resistor or wire is not known, connect the red wire direct to the ignition switch or to a switched live on the fuse box - on the key side of the fuse. (see pic E).

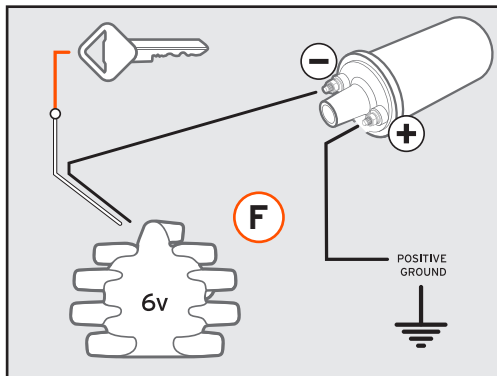

G) On a 6 volt positive ground model, remove the ignition switch wire from the negative (-) coil terminal and swap in the black module wire to the same negative coil terminal. Connect the white module wire to the ignition switch wire you removed from the coil. Do NOT attach the white

wire to the ignition coil. (see pic F). Connect an insulated AWG 20 copper stranded wire from the positive coil terminal direct to a good quality chassis ground.

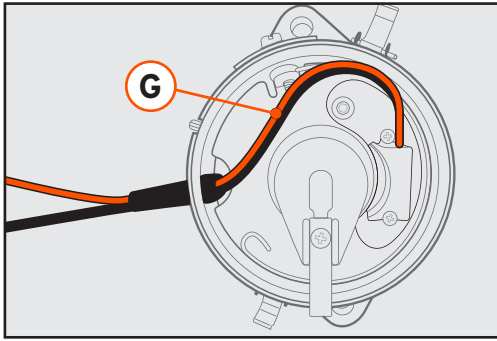

as the CDI unit. DO NOT connect the red wire to the coil. 6 volt positive ground models are NOT compatible with CDI units.

4. START THE ENGINE

WARNING:

If your vehicle has a manual transmission, verify that it is in neutral gear with the parking brake on before starting. With an automatic transmission, confirm that it is in 'park' before starting. Failure to do so may result in unintended vehicle movement causing property damage, serious personal injury, or death.

Note: Most early Ford 6 volt positive ground coils were ballast resisted. If possible connect the white module wire to the switched ignition side of the resistor (often located under the dashboard).

H) Terminals are supplied. Use standard auto wire - 20 gauge (1.5mm) 15 amp - to lengthen any wires. Crimp tightly or solder (best) the joints and insulate all connections. Do not pull on the wires causing them to tighten inside the distributor cap. The wires must allow movement of the timing adjustment plate, yet not interfere with any moving parts (see pic G).

WARNING:

DO NOT reverse the polarity of the wires from the advice above. It will damage the ignition module irreparably and void the warranty.

I) The 12 volt negative ground e-FIRE distributor is compatible with most Capacitor Discharge Ignition units. Follow the manufacturer's instructions, connecting the black wire to the CDI unit as if connecting your low tension wire. The red wire is connected to the same switched power source

A) Reconnect the battery and start the vehicle as usual. Run the engine to full operating temperature, then check it idles and revs freely and take it for a test drive. While Stromberg e-FIRE distributors for Flathead Fords are factory pre-set to match OE timing, some fine tuning may be required for local gasoline and individual engine specification. If you suspect any problems stop the engine immediately and refer to Section 6, Troubleshooting.

B) Pay particular attention to any knocking, pinking or detonation sound under engine load, which may indicate too much timing advance. If so, stop the vehicle, retard the static timing a little (see pic H overleaf) and test again.

WARNING:


Too much distributor advance can cause engine detonation, which can damage an engine very quickly. If you hear detonation, stop the engine immediately and retard the timing.

WARNING:

Do not leave the ignition switched on when the car is not running, as this can cause permanent overheating damage to the coil and ignition module.

5. ENGINE TIMING

- A) Stromberg model 11A and 21A e-FIRE distributors are set to 4 degrees static advance at idle, with a further 22 degrees maximum mechanical advance at around 2600rpm. Different settings may be required for non-standard engines and differences in local gasoline.
- B) Static timing adjustment can be made using the timing screw on the side of the distributor. Loosen the screw (see pic H) then slide it clockwise (down) to advance engine timing or counter-clockwise to retard. The adjustment is sensitive. Each mark on the adjustment plate will change the timing 4 degrees of crankshaft rotation (2 degrees on a distributor machine).

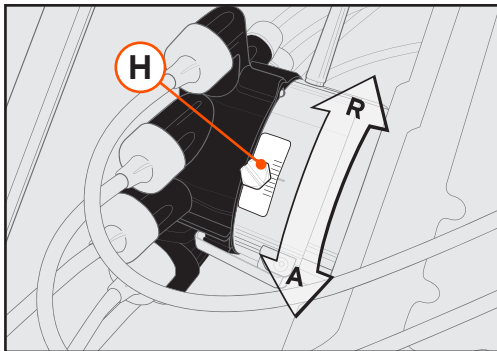

WARNING:

Always stop the engine before adjusting distributor timing. Failure to do so may result in property damage, severe personal injury or death.

- C) For advanced tuning, the Stromberg e-FIRE distributor also allows adjustment of the total mechanical advance and advance curve. Please visit the Stromberg Tech Center at www.stromberg-97.com for further advice.

6. TROUBLESHOOTING

- NOTE:** Distributors can be frustratingly difficult to troubleshoot and are often blamed for other engine-related problems. Please remember that proper engine compression, spark plug gap and heat range, carburetor adjustment, valve lash and other factors are also important in achieving optimum engine efficiency and performance.
- A) If the vehicle ground (earth) is poor, performance will be compromised. Check for a good electrical ground connection.
 - B) On 12 volt negative ground models, if the engine runs roughly, remove the red ignition wire from the coil positive and connect it with a longer jumper wire direct to the positive battery terminal. If engine running improves, this usually indicates low voltage to the module caused by a ballast resistor, in which case connect the red wire onto a different power source, like the ignition key.
 - C) If the engine will not start, make the usual vehicle diagnostic checks for a spark at the plugs. Are your plug leads connected properly and in the correct order? Do you have fuel? If the engine tries to start, but won't run well, you may need to check and adjust the timing.

- D) If the engine misfires after a period of use, and when hot, it could be signs of early ignition module heat failure. Check that the vehicle is not overcharging. Check that the coil has enough resistance (over 1.5 Ohms). Check for an incorrectly matched coil and ballast resistor.
- E) If at any point the module is wired incorrectly, supplied with excess voltage or the polarity reversed, it will fail and void your warranty.

NOTE: For further troubleshooting tips, visit the Stromberg Tech Center at: www.stromberg-97.com.

7. MAINTENANCE

- A) The Stromberg e-FIRE distributor requires very little maintenance. After an initial running period, check and retighten all bolts and screws as required. Check all electrical connections, including the spark plug leads. Aim to keep water and road salt out of the distributor.
- B) Stromberg replacement parts are recommended for reliable fit and service life. Always use Stromberg e-FIRE ignition modules.

8. WARRANTY

All Stromberg products receive numerous checks and tests to ensure optimum quality and performance. Stromberg also takes customer support very seriously, and this extends to fair Limited Warranty terms and procedures across our full product range as outlined below.

Stromberg warrants its new products to be free from defects in material and workmanship for one (1) year from the date of original purchase by the Purchaser.

Warranty Exclusions

Stromberg does not warrant products which are damaged as a result of improper installation or application, including but not limited to:

1. Failing to follow or deviating from any installation guidance provided by Stromberg, including incorrect wiring, a coil with insufficient resistance, excess voltage, and reversed polarity.
2. Modifying or altering the distributor beyond factory specifications, outside what could be considered tuning for optimum performance.
3. Subjecting the product to adverse conditions, overheating, abuse, neglect, accident, collisions, dirt or contaminants, water or corrosion, or faulty repair; and improper adjustment.
4. Stromberg also does not warrant, and disclaims all liability for, products used for racing, or any non-automotive, marine, or aircraft application or purpose.

Stromberg is the sole and final judge of whether a product is covered by the warranty. In the event that Stromberg determines that a defect in material or workmanship exists, Stromberg's responsibility is strictly limited to the repair or replacement of the defective product or parts, as Stromberg elects, and the return of the repaired or replaced product or parts to the Purchaser, freight prepaid. Stromberg has no other obligation, and makes no other warranties - whether express or implied.

As used herein, the term 'Purchaser' shall mean the original purchaser or consumer of the Stromberg product. The Limited Warranty is restricted to the Purchaser. The warranty is not assignable or otherwise transferable.

Limited Warranty

STROMBERG PROVIDES NO WARRANTY EITHER EXPRESS OR IMPLIED OTHER THAN THIS LIMITED WARRANTY. STROMBERG EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF ANY KIND INCLUDING, BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL STROMBERG OR ITS AGENTS, EMPLOYEES, OFFICERS, DIRECTORS, RELATED ENTITIES OR SUCCESSORS, BE LIABLE FOR SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR PUNITIVE DAMAGES ARISING OUT OF, OR IN CONNECTION WITH, PRODUCTS OR SERVICES SOLD, WHETHER BASED IN WARRANTY, CONTRACT, TORT (INCLUDING NEGLIGENCE AND STRICT LIABILITY), OR ANY OTHER LEGAL THEORY. STROMBERG'S MAXIMUM LIABILITY SHALL NOT EXCEED THE PURCHASE PRICE OF THE PRODUCT. STROMBERG NEITHER ASSUMES, NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR US, ANY OTHER LIABILITY IN CONNECTION WITH THE SALE OF THIS GENUINE STROMBERG PRODUCT. STROMBERG DOES NOT WARRANT WHATSOEVER ANY ACCESSORIES OR PARTS SUPPLIED BY OTHER MANUFACTURERS.

Any implied warranty determined to be applicable is limited in duration to the duration of this warranty. This warranty gives you specific legal rights. However, you may also have other rights that may vary from state to state or province. This Limited Warranty constitutes the entire understanding between Stromberg and the Purchaser.

Warranty Procedure

To claim under this Limited Warranty, the Purchaser must:

1. Return the product to the place of purchase.
Or contact Stromberg directly by email at: warranty@stromberg-97.com
2. Provide the dated purchase receipt.
3. Provide a clear description of the problem.
4. Be in receipt of a Return Goods Authorization (RGA) number. NO RETURNS WILL BE ACCEPTED WITHOUT AN RGA NUMBER.

Most warranty issues are very simple, and in most cases, Stromberg will aim to repair the distributor, either with a replacement part or with advice on a simple owner fix. In the event that the distributor needs further investigation, an RGA number will be issued and the product can be sent for swift examination and repair. Warranty claims can be rejected if the date of purchase cannot be established.

Do not send products directly to Stromberg without our prior notice. Stromberg assumes no responsibility for products sent directly to Stromberg.



If you need further information
or assistance, please contact
your Stromberg dealer,
or e-mail us direct at:

tech@stromberg-97.com

or log on to our Tech Center at:
stromberg-97.com

